


ARCHITECTURAL APC-2

**5-PLY HARDWOOD VENEER
3-PLY PLASTIC LAMINATE
BONDED TO CORE**

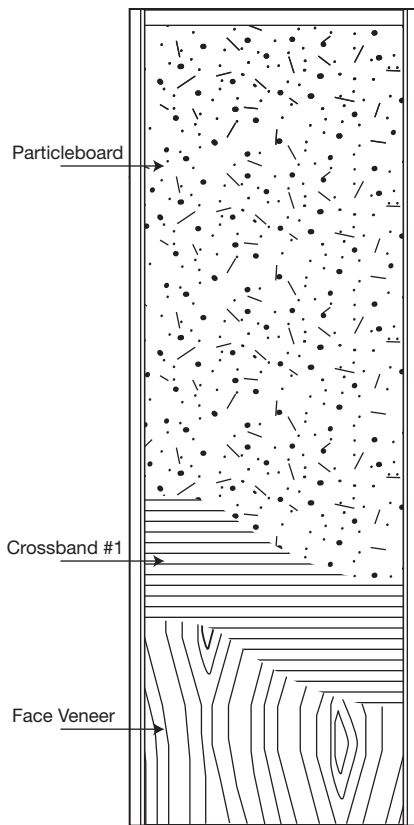

DESCRIPTION

Designated for heavy usage in schools, hospitals, public buildings, and other corridor entry applications. Highest grade for total door performance and appearance. Meets or exceeds the following industry standards: Current ANSI / WDMA I.S. 1A; W.I. Section-12; and AWI Section-1300 when specified.

SPECIFICATIONS

Maximum Size:	4'-0" x 10'-0"
Thickness:	1-3/8" or 1-3/4" standard; up to 2-1/4"
Stiles:*	1-1/8" laminated hardwood, bonded-to-core
Rails:*	1-1/8" minimum softwood
Core:	Particleboard. Meets or exceeds requirements of ANSI A208.1 and CS236-66.
Adhesives:	Type-II interior
Faces:	All commercially available Premium Grade, 5-Ply hardwood species; medium-density overlay and high-pressure laminates.
Openings for Lights and Louvers:	Total area of openings not to exceed 40% of door area, or 50% of door height; must be a minimum of 5" from edge of door.
Pre-fitting:	May be pre-fit to net sizes as specified.
Machining:	May be factory machined for hardware as specified.
Other Detail Work:	Metal louvers and light stops as specified. Wood light stops to match faces.
Warranty:	Life of original installation (interior use). See "Haley Warranty" for specific details.
Short Form Specification:	Doors shall be "Haley Architectural APC-2, Particleboard Core" manufactured according to the specifications shown in the Haley catalog.

*Stile and rail (frame) dimensions may vary due to machining specifications.