


DESCRIPTION

Haley's Architectural Hollow Core Doors are recommended for interior use. The quality construction offers durability and economy.

Meets or exceeds the following industry standards: Current ANSI / WDMA I.S. 1A; W.I. Section-12; and A.W.I. Section-1300 when specified.

SPECIFICATIONS

Maximum Size:	4'-0" x 8'-0"
Thickness:	1-3/8" or 1-3/4"
Stiles:*	1" softwood
Rails:*	1-1/8" minimum
Lock Blocks:	2-5/8" x 16" softwood. Total area including stile 3-5/8" x 16".
Core:	Expanded paper
Adhesives:	Type-II interior
Faces:	All commercially available hardwood-veneer species, medium-density overlay.
Openings for Lights and Louvers:	Total area of openings not to exceed 40% of door area, or 50% of door height; must be a minimum of 5" from edge of door.
Pre-fitting:	May be pre-fit to net sizes as specified.
Machining:	Must be factory machined for hardware as specified.
Other Detail Work:	Metal louvers and light stops as specified. Wood light stops to match faces. Aluminum channels recommended on bottom rail of exterior
Warranty:	1 year residential. See "Haley Warranty" for specific details.
Short Form Specification:	Doors shall be "Haley Architectural Hollow Core Doors" manufactured according to the specifications shown in the Haley catalog.

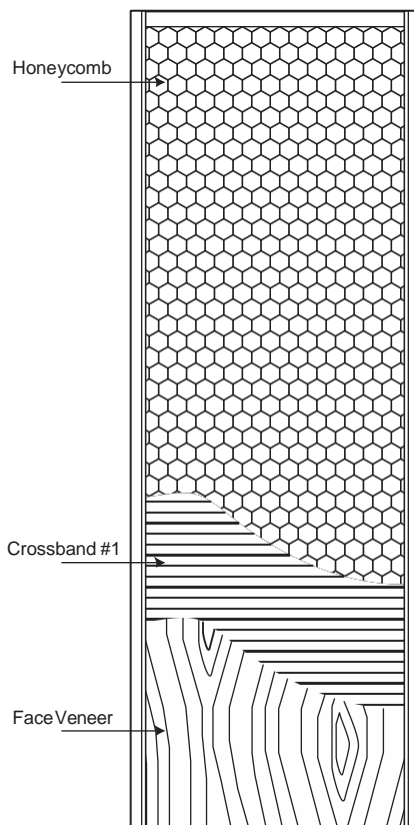

* Stile and rail (frame) dimensions may vary due to machining specifications.