


STANDARD FLUSH HOLLOW CORE DOOR

HOLLOW CORE - NO ADDED UREA FORMALDEHYDE

Hollow core door recommended for interior use. Quality craftsmanship offers durability and economy. Meets or exceeds the following industry standards: Current ANSI/WDMA I.S. 1A.

PRODUCT FEATURES AND SPECIFICATIONS

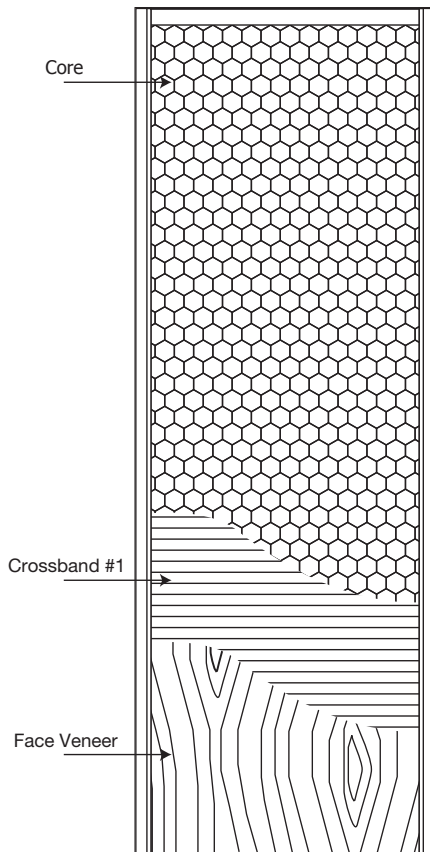

* Stile and rail frame dimensions may vary due to specifications.

Maximum Size: 4' 0" X 8' 0"

Thickness: 1 3/8" or 1 3/4"

Stiles and Rails*: 1 1/8" minimum; Fingerjoint; Fiber. (Fiber not avail on 1-3/4" doors.)

Core: Expanded corrugated kraft fiber.

Lock Blocks: 2 5/8" X 16" softwood Total area including stile 3 5/8" X 16".

Adhesives: Type II Interior.

Faces: Available in Birch, Red Oak, Legatex, Raw or Primed Hardboard, and Lauan. Please call for other species available.

Lites and Louvers: Please call customer service for options.

Prefitting: May be factory machined for hardware as specified.

Warranty: 1-Year residential. See Haley warranty @ www.haleybros.com for specific details.

Short Form Specification: Doors shall be "Haley Standard Hollow Core Doors" manufactured to the specifications shown in the Haley catalog.